


USB - C (USB 3.1 Gen 2, Superspeed+) adapter board

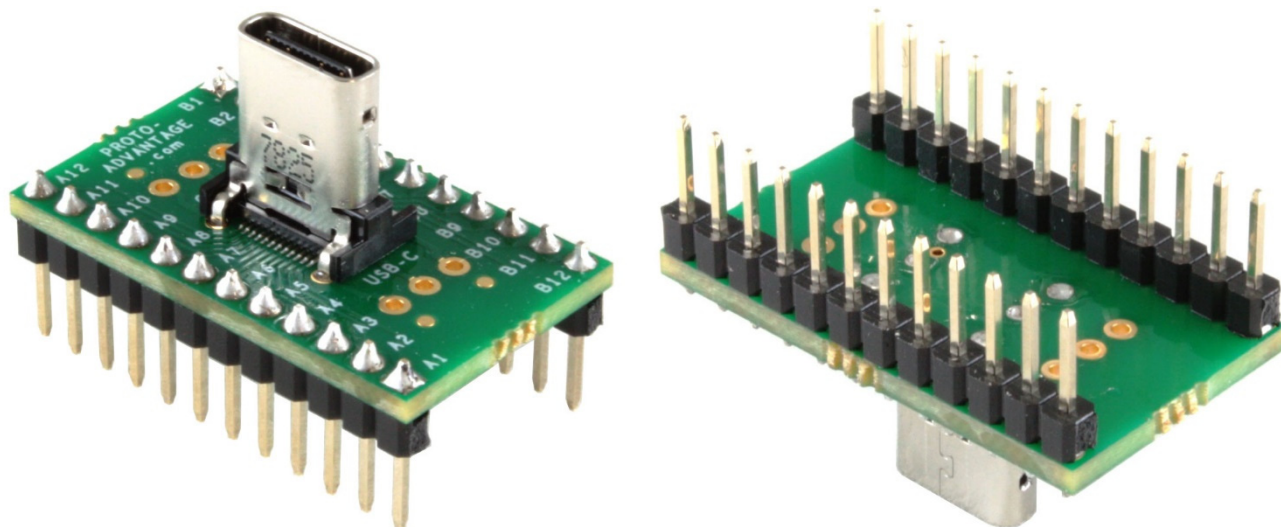

Product Highlights

This adapter comes fully assembled with connector and pins installed.

Specifications

PCB dimensions:	1.2" x 0.7" x 0.063" (30.48mm x 17.78mm x 1.6mm)
PCB construction:	FR-4 UL94V-0
PCB operating temperature range (without connector):	-40°C to +130°C
PCB reflow maximum temperature (without connector):	+260°C
PCB assembly standard:	IPC-A-610 Class II
Bottom header pin pitch:	0.1" (2.54mm)
Bottom header row spacing (pin-center to pin-center):	0.6" (15.24mm)