

Datasheet revision 1.0

Discrete (2 Pin) Stencils

Specifications

Stencil Size:


0.9" x 1.3" x 0.004" (22.86 x 33.02 x 0.10 mm)

Stencil Material:

Laser Cut Stainless Steel

| Part Numbers | DIMENSIONS | | | | | |
|-----------------|-------------|-------------|-------------|--------------|--------------|--------------|
| | mm | | | inches | | |
| | A | B | C | A | B | C |
| DC01005-S | 0.20 | 0.20 | 0.25 | 0.008 | 0.008 | 0.010 |
| DC0201-S | 0.40 | 0.20 | 0.35 | 0.016 | 0.008 | 0.014 |
| DC0402-S | 0.25 | 0.65 | 0.65 | 0.010 | 0.026 | 0.026 |
| DC0603-S | 0.70 | 0.90 | 1.00 | 0.028 | 0.035 | 0.039 |
| DC0805-S | 1.05 | 0.95 | 1.40 | 0.041 | 0.037 | 0.055 |
| DC1206-S | 2.05 | 1.05 | 1.80 | 0.081 | 0.041 | 0.071 |
| DC1210-S | 1.90 | 1.10 | 2.70 | 0.075 | 0.043 | 0.106 |
| DC1411-S | 1.10 | 1.80 | 2.25 | 0.043 | 0.071 | 0.089 |
| DC1813-S | 2.70 | 1.40 | 3.40 | 0.106 | 0.055 | 0.134 |
| DC2010-S | 3.45 | 1.25 | 2.70 | 0.136 | 0.049 | 0.106 |
| DC2220-S | 3.75 | 1.55 | 5.40 | 0.148 | 0.061 | 0.213 |
| DC2413-S | 2.60 | 2.25 | 2.30 | 0.102 | 0.089 | 0.091 |
| DC2512-S | 4.85 | 1.25 | 3.40 | 0.191 | 0.049 | 0.134 |
| DC2917-S | 4.15 | 2.05 | 4.60 | 0.163 | 0.081 | 0.181 |
| DC2924-S | 3.85 | 2.35 | 4.15 | 0.152 | 0.093 | 0.163 |

Top View (SMD Footprint)

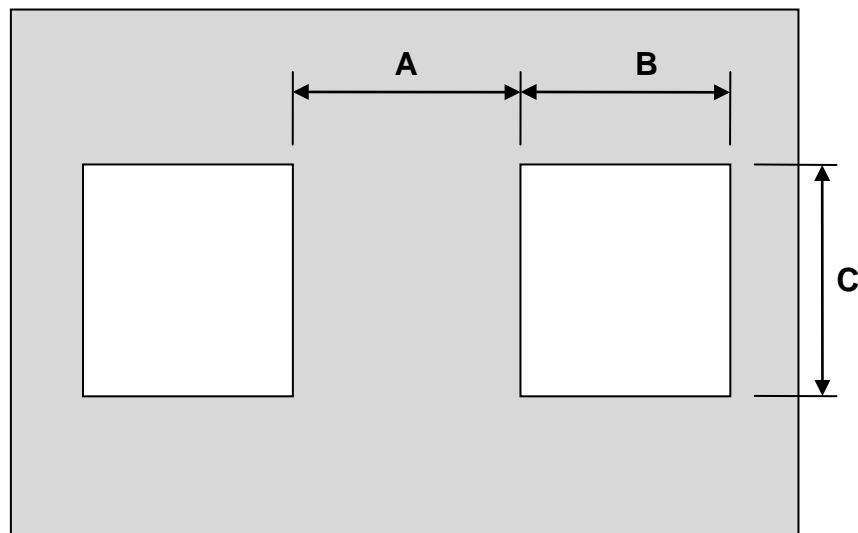

(Representative drawing only - not to scale)

Application Notes

[AN0001: IC Assembly Instructions if Using a Stencil](#)

[AN0002: Pin Assembly Instructions](#)

[AN0003: Adapter Selection Guide](#)

[AN0004: Stencil Selection Guide](#)