


Datasheet revision 1.0

www.Proto-Advantage.com

SOIC-16 to DIP-16 SMT Adapter (150 mil / 200 mil body)

| DIMENSIONS | | | | | | |
|------------|------|------|------|--------|-------|------|
| REF. | mm | | | inches | | |
| | MIN. | TYP. | MAX. | MIN. | TYP. | MAX. |
| Α | | 2.90 | | | | |
| В | | 2.50 | | | | |
| С | | 0.60 | | | | |
| D | | 0.67 | | | | |
| Е | | 1.27 | | | | |
| F | | | | | 0.300 | |
| G | | | | | 0.100 | |
| Н | | | | | 0.025 | |


Top View (SMT Footprint)

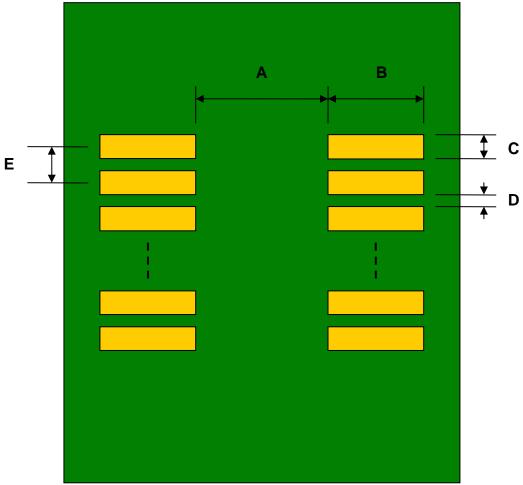

(Representative drawing only - not to scale)




Bottom View (DIP Pins)

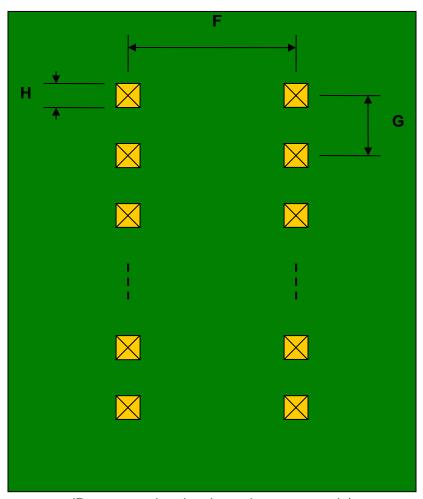

(Representative drawing only - not to scale)

Side View (DIP Pins)

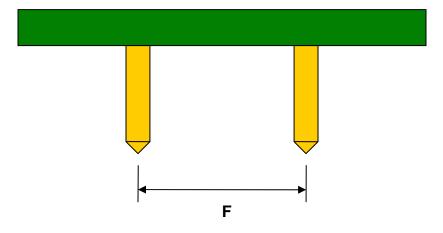

(Representative drawing only - not to scale)

